

MF RB SERIES

Variable Chamber Round Balers

MF RB 4160V & MF RB 4180V



MASSEY FERGUSON

BORN TO **FARM**

Contents



Page 06
High speed pick-up



Page 08
Hydroflexcontrol - two stage protection system



Page 09
Bale chamber



Page 12
Monitoring and Control



Page 13
Experience, innovation and durability

- 03 High quality fodder and straw
- 04 Variable Chamber range
- 05 New MF RB Exclusive
- 06 High speed pick-up
- 07 Xtracut for optimum cutting performance
- 08 Hydroflexcontrol - Two stage protection system
- 09 Bale chamber
- 11 Wrapping options
- 12 Monitoring and Control
- 13 Experience, innovation and durability
- 14 Customer support
- 15 Specifications & Options

MF RB SERIES

Whether baling silage, hay or straw, farmers are always looking for high output, cost effective and flexible solutions to produce quality, dense bales which are easy to transport and require minimum storage space.

Consistent bale density is essential for all baled products, and the new range of MF variable chamber round balers offer farmers the best solution due to their class-leading compaction, cutter and pick-up capabilities. As a result, they are the ideal choice for those looking for high throughput and quality fodder or straw.

For silage requirements, these balers produce tight, well-shaped bales, which are a prerequisite for the fermentation process needed to retain the crop's essential nutrients for forage.

In hay, straw and biomass, the MF RB Series Balers form dense bales which are easy to handle and stack. They also retain their quality for a long period of time.

The MF variable chamber round balers are therefore suitable for a diverse range of farms and contracting businesses, including mixed, arable and livestock.



MF RB Series Round Balers

Variable Chamber range

Massey Ferguson RB 4160V and RB 4180V round balers share a common platform and produce bales from 0.9 m up to 1.60 m or 1.80 m in diameter respectively.

2.00 m, 2.25 m or 2.40 m pick-up options with a camless design offer a higher working speed, reduced maintenance and a much quieter operation in the field.

A range of models, with feeder rotor or cutters with 13, 17 or 25 knives is available.



Four seamless, double-ply belts provide smooth running and exceptional service life.

The Constant Pressure System (CPS) combines spring and hydraulic action and ensures constant pressure during the bale formation, depending on the selected bale diameter.

Varionet, the net wrapping system, can handle all net widths and provides excellent side-to-side bale coverage for improved stability in transit and storage.

New MF RB Exclusive

Improving productivity and reducing operator fatigue



Load Sensing or TIM (Tractor Implement Management) control of the baler

Slot cleaning action moves the knives in and out during each net/twine tying cycle to keep the knife slots clean

Automatic pick-up raises when reversing and during the bale weighing process

Bale finisher disengages the knives to leave the outer bale layers uncut, ensuring perfectly shaped bales

Tailgate opens & closes automatically for bale release as soon as the tying process finishes

Standard LED maintenance and service lights beneath the side panels turn on when the panels are opened

Sensors constantly measure and document the forage moisture content during baling

The bale weighing function records the weight of every bale automatically

Xtracut cutter - flexible choice for cut length

High speed pick-up

Higher operating speeds are possible with the Massey Ferguson camless pick-up design.

With fewer moving parts, the camless pick-up is quieter, simpler and more reliable. Low maintenance and less adjustments save time and increase productivity.

The pick-up system has five tine bars with each tine being spaced only 64 mm apart while granting the longest flexible pickup tines in the market. These special properties provide a far higher intake capacity and a smoother even feed at the highest speed.

Operators know why: There is a very hungry rotor unit waiting for feeding the chamber. For a perfect non-stop crop flow, the distance between pickup and rotor is reduced to a minimum.



Crop press roller option

A reinforced crop press roller equipped with rake is fitted as standard to enhance crop flow into the chamber.



Heavy duty tines

5 rows of heavy duty tines with large coil diameter for enhanced durability in silage and stony conditions.

Xtracut for optimum cutting performance

Chopping silage whilst baling offers several benefits:

- **Improves** forage quality resulting in better fermentation and palatability
- **Saves time** allowing a faster distribution of silage
- **Reduces waste** during feeding
- **Helps to achieve greater density** thus reducing haulage & wrapping costs

Designed for optimum performance, Massey Ferguson round balers can be equipped with 13, 17 or 25 knives. Cutter units are fitted with the longest knives on the market, making sure that no material will pass through uncut.


Xtracut 17 and 25 feature two sets of hydraulically operated knife banks with separate control from the cab depending on customer requirements.

The operator can select:

- A single knife bank
- Both knife banks
- Disengagement of all knives



Xtracut 13 rotor features 90 mm crop cutting length

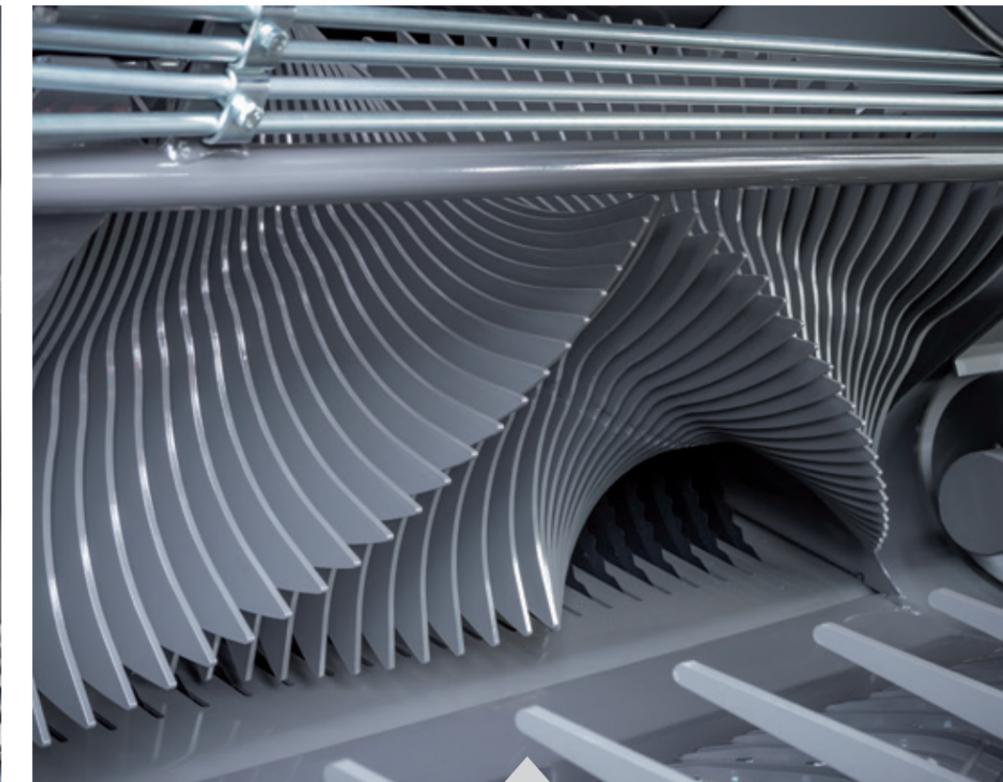

Xtracut 25 rotor has 4-tines design increasing chopping capacity

Hydroflexcontrol - Two stage protection system

Racing against weather and time to gather the best quality crop is always a challenge for man and machine.

To maximise efficiency in the field and minimise downtime from crop blockages, the MF Round balers are fitted with the unique Hydroflexcontrol protection system which works in two stages:

Stage 1. Automatic mechanical floor cushioning to clear minor blockages

Stage 2. Hydraulically controlled floor lowering to clear major blockages



The first stage of Hydroflexcontrol allows movement of the front part of the feed chamber floor and will automatically prevent up to 80% of potential blockages and will keep you going without unnecessary downtime.

Should a major blockage occur, stage two of hydroflexcontrol is activated by the operator, and is cleared by lowering the rear of the feed table floor hydraulically from the cab, allowing for material to easily pass through into the bale chamber, therefore minimizing downtime.

Stage 1



The patented protection system prevents peak loads from turning into blockages by gentle lowering of the floor which is suspended on rubber blocks or steel springs, depending on the model.

Stage 2



In the event of a blockage the operator can easily open the feed table floor and lower the knives at the same time to provide enough space for material to pass through.

Bale chamber


The bale chamber side panels are securely aligned during the production process with two large diameter tubes welded to the frame, providing a hard-wearing and rigid connection for extended durability and better bale density control.

Four durable, double-ply, seamless belts have excellent grip on the bale. With two stretch-resistant core layers made of a special synthetic material, the belts can withstand high loads when forming heavy silage bales.

A patented bale formation system features a sliding tailgate that moves downwards as the bale forms allowing the growing bale to move backwards. The bale chamber has a small bale start-off section with two additional rollers for better bale core formation.

The benefits are as follows:

- **Reduced pressure on the intake area**
- **Even pressure distribution along all components involved in bale shape and density**
- **Reduced power requirements**

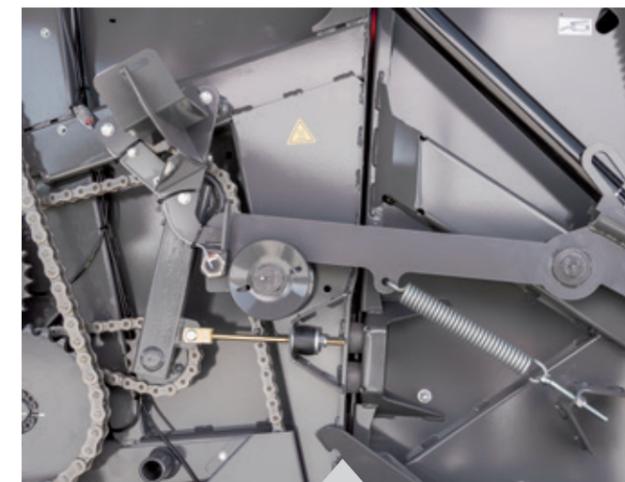


Mechanical tail-gate locking device; simple, fast and efficient, resulting in uniform bale diameter, high density bales and lower power consumption.



Bale chamber



Bale volume increases exponentially in relation to its diameter, together with a corresponding belt pressure, to keep the bale density constant.

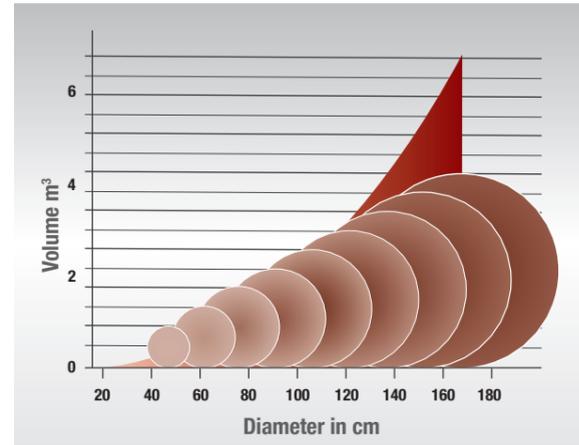

The Massey Ferguson **Constant Pressure System (CPS)** retains pressure using two large springs during bale formation, thus maintaining the correct pressure from the core outwards. Once the core is formed, the hydraulic system takes over, which increases the pressure until the complete bale is formed. This keeps the bale surface pressure constant throughout the complete cycle.

The end-result is uniform round bales with a firm and consistent shape, making them easy to handle and store with excellent crop conservation.

Depending on the baler specification, the maximum hydraulic system pressure in the bale tensioning arms can reach 140 or 180 Bar.

Wrapping options

The tried and tested Varionet net wrapping system features a special net tensioning and spreading device that is capable of dealing with various widths and types of net allowing for fast wrapping of bales from edge to edge or over the edge.

Perfect wrapping of perfectly formed bales is provided by the Varionet or Variotwin systems, saving cycle time, tying materials and preserving bales for safe handling and storage afterwards.




The **Easy Loading System (ELS)** allows one spare roll to be carried on the baler, allowing for roll replacement to be made in a matter of minutes. In addition to ELS most specifications feature storage for an additional, third net roll on the left hand side of the baler, increasing effective time in the field even further.

For better efficiency, a new tying system with conveyer belt is now available on all variable chamber models to guide the net into the chamber, replacing the conventional system with movable net feed roller.



The optional Variotwin twine system offers simple and economical bale tying. The unique Variable Speed Control allows for additional twine revolutions on the bale edges, securing bale ends and increasing overall tying speed, which is particularly beneficial when baling light crops.

Monitoring and controls

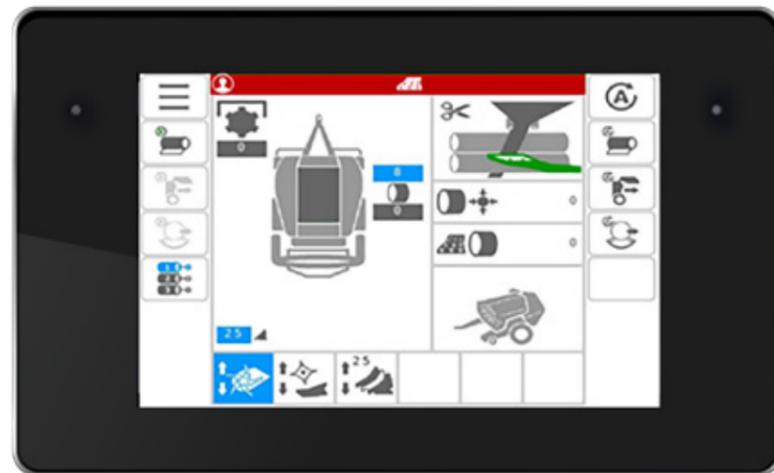

The **Bale Control Terminal**, supplied as standard, gives the operator a great overview of the baling process and includes a range of intuitive functions. The high-definition touchscreen features a modern working display with improved operating efficiency.

The following functions can be controlled with the Bale Control Terminal:

- Knife selection
- Bale pressure adjustment
- Bale size adjustment
- Net layer adjustment
- Net start/stop/pause
- Visual bale chamber filling
- Softcore bale on/off
- Bale counter
- Total bale counter
- Customer settings
- Sensor and actuator settings



The **E-Link Pro** monitor with integrated ISOBUS technology features a large bright screen which offers great visibility of multiple parameters, giving the operator more information and control of the baler.

Specific field or customer information, such as the number of bales or hours worked, can easily be set and collected with the Wizard menu.



If a tractor is fitted with ISOBUS control, it is also possible to use the tractor's monitor to view all the key information about the tractor and the baler in one place.




Experience, innovation and durability

Massey Ferguson is a world leading brand with extensive experience in hay and forage production on all continents.

The Massey Ferguson round baler range is built to last and designed to exceed your expectations...

The number of unique and patented features make our balers stand out from the crowd.

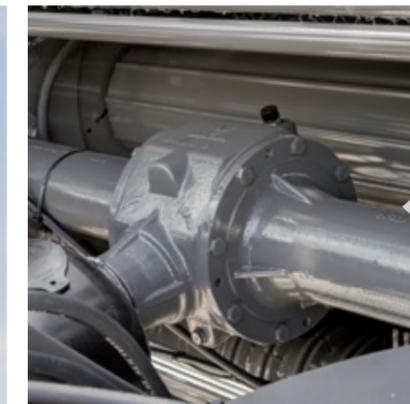

The Powersplit gearbox equally divides and transfers power to drive the rotor unit on one side and the roller drives on the other, reducing the overall power requirements by simplifying the drivelines. With the upgrade to the 1,000 rpm gearbox, you will receive:

- 20% better power transmission
- Perfect cutting quality even in heavy conditions
- Reduced tractor fuel consumption



Automatic chain lubrication with individual adjustment for each chain guarantees sufficient oil supply, reduces maintenance time and extends chain service life. For added durability the highest quality chains are used throughout the baler.



Full width side doors provide easy access for maintenance. The smooth surface design prevents dust accumulation beneath the panels while secure locking prevents unintended opening and potential damage.

In addition, the knives are close at hand at all time, with the additional knives holder:

13, 17 or 25 additional knives according to cutting unit.



Regular and sufficient lubrication of roller bearings is extremely important, particularly in adverse conditions, for example when baling silage. Centralized grease banks for roller bearing lubrication are located in convenient positions for easier access and reduced service time.

MFservices

Combined services to increase our customers' profit and efficiency



Massey Ferguson and its Distributors and Dealers are always prepared and ready to put in the extra mile to support your purchase. Agriculture can be a tough business, that's why we make sure that you can get support whenever you need it and at crucial times of the year.

Our Dealers are committed to finding the right product for you and then supporting you with the best service, parts provision and backup. You'll be part of a dedicated family of highly skilled specialists who make it their business to give you genuine, top quality service support.

We understand farming and are aware of the challenges each individual faces, therefore our Dealers can help you to plan for a successful future. Ask your Dealer about our finance plans, which can include leasing, hire purchase, contract hire and loan facilities.

You can also secure your assets with an MFCare Service and Extended Warranty Plan*: a complete package aimed at providing total care for your combine including routine maintenance, repair cover and full AGCO backed warranty.


*MFCare Service and Extended Warranty Plan may not be available or may be market dependent. Please contact your Massey Ferguson Dealer to check availability in your area.

Specifications as standard

Model	MF RB 4160V Classic	MF RB 4160V Xtra	MF RB 4180V Classic	MF RB 4180V Xtra
Bale Chamber				
Diameter, m	0.90 - 1.60		0.90 - 1.80	
Width, m			1.23	
Volume, m ³	2.48		3.15	
Maximum belt tension pressure, bar			140/180	
Mechanical chamber locking			●	
Varionet net wrapping			●	
Net and Twine tying unit			○	
Bale ramp			●	
Pick-up				
Width, m	2.00 / 2.25	2.25 / 2.40	2.00 / 2.25	2.25 / 2.40
Rake to rake width, m	1.60 / 1.86	1.86 / 2.12	1.60 / 1.86	1.86 / 2.12
Pick-up tine spacing, mm			64	
Press roller with rake			●	
Feeding				
Feeder Rotor	●	●	●	●
Hydroflexcontrol	-	●	-	●
Xtracut, 13-knife cutter	-	○	-	○
Xtracut, 17-knife cutter	-	○	-	○
Xtracut, 25-knife cutter	-	○	-	○
Monitoring				
Bale Control Terminal			●	
E-Link Pro monitor	-	○	-	○
Tractor requirements				
Recommended horsepower, kW/HP	60 / 80	>100	60 / 80	>100
Hydraulic spool valves			2	
Gearbox 540 rpm	●	●	●	●
Gearbox 1,000 rpm	-	○	-	○
Tyre options	15.0/55-17 19.0/45-17	15.0/55-17 19.0/45-17 500/55-20	15.0/55-17 19.0/45-17	15.0/55-17 19.0/45-17 500/55-20
Dimension and weights				
Transport length, m	5.00		5.10	
Transport height, m	3.05		3.15	
Transport width, m	2.80		2.80	
Approximate weight, kg	min. 3,690	min. 3,950	min 3,870	min 4,070
Options				
Hydraulic brakes			○	
Air brakes			○	
Variotwin - twine tying system			○	
Exclusive package	-	○	-	○

- Not available
● Standard specification
○ Optional

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

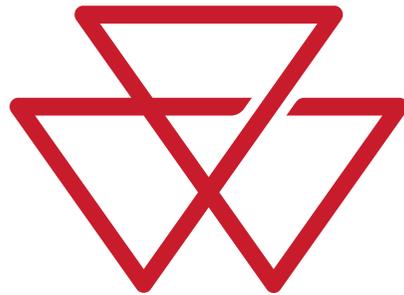

MASSEY FERGUSON

Web: www.MasseyFerguson.co.uk

Facebook: www.Facebook.com/MasseyFergusonGlobal

Twitter: [Twitter.com/MF_EAME](https://twitter.com/MF_EAME)

Instagram: [Instagram.com/MasseyFergusonGlobal](https://www.instagram.com/MasseyFergusonGlobal)

YouTube: www.YouTube.com/MasseyFergusonGlobal

Blog: Blog.MasseyFerguson.com



MASSEY FERGUSON® is a worldwide brand of AGCO.
© AGCO Corporation | A-A-16547 | 2022 English



MASSEY FERGUSON

BORN TO **FARM**