



# Tandem Tanker

Contractor/Industrial Specification

This is the specialist tandem slurry tanker range from Major Equipment. All MAJOR tankers are constructed from 6mm steel for maximum strength. These tankers sit upon high specification commercial axles. They are supplied with steering axles as standard, for minimal grounds compaction and easy maneuvering. The MAJOR tandem axle tanker is baffled to prevent 'wave' motions during transport ensuring safer and smoother towing.




*Being new to the slurry game we were fairly green; the options were bewildering. While there are plenty of manufacturers to choose from, it was Major Equipment that sat down with us and really talked us through the selection process.*  
**GRANT LUMSDEN, MANAGER, BARFOOT FARM LTD**


Model	Capacity		OA Length (Hitch to coupling ball)	OA Width (Depends on tyre)	OA Height Hitch @ 450mm	Wheel Recess	Weight (Kg)	
	Gallon	Litres					Empty	Full
3000TDM	3,000	13,638	7.7m	2.7m	3.4m	Yes	4,700	18,358
3500TDM	3,500	15,900	8.7m	2.7m	3.4m	Yes	5,020	21,277
4000TDM	4,000	18,185	9.4m	2.7m	3.4m	Yes	5,600	24,113



Heavy duty bogey axle, ideal for rough terrain

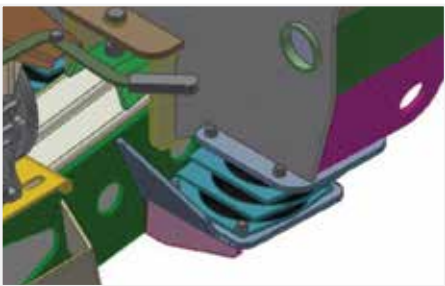

Drawbar is fitted with rubber buffers to give a smoother and safer journey

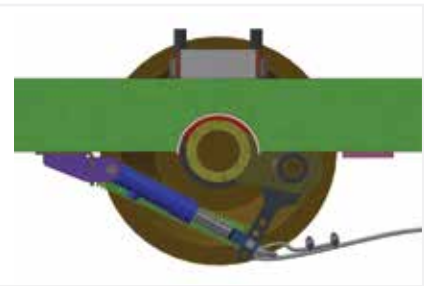

Hydraulic brakes as standard ensuring compliance with the regulations for this model of tanker



Internal baffle plates improve operator driver safety by preventing wave motions during transport.



The joints on the tank are welded to ensure a high-quality and visually perfect weld seam.



Fitted with safety breakaway cable for safer use on public highways.



Fully galvanised finish



Tyre	560/60/22.5 BKT	600/55R26.5 BKT	650/55R26.5 BKT	710/50R26.5 BKT	750/45R26.5 BKT
W (mm)	1244	1333	1389	1383	1349
D (mm)	3767	4077	4216	4246	4147



# Tanker Options/Accessories

We offer a full custom design and build programme for specialist contractor slurry tankers. Below is a small sample of the optional components that we offer. Please speak to your authorised MAJOR dealer for more specific advice.

## Filling



**Autofiller:** 6" or 8" hydraulic coupler. It is ideal for slurry pits that are difficult to access. It reduces your filling time by half. A galvanised tripod is supplied as standard.



**Top Fill:** The hydraulically controlled top fill is used to fill the tank from the top. This option allows for high flow rates and fills the tank to its optimal level.

## Spreading/Emptying



**Raingun:** Centre mounted or rear mounted in conjunction with a garda pump fitted with stone trap as standard.



**Road Blaster Unit:** This unit is fitted beneath the tanker for high-pressure road washing. The angle of the nozzles can be adjusted for tough conditions



**Washdown Hose Assembly:** Consists of a 2" gate valve and 2" quick hose connector



**Water Spinner:** This unit is for dust suppression on roads, building sites and waste disposal plants

## Additional Equipment



**Double LED Lights:** Double LED lights and LED side markers can be fitted for increased operator safety



**Fully Opening Rear Door:** These doors are mounted on hinges. They are locked by six threaded hooks.



**Full Length Sight Tubes:** To allow the operator to easily identify how much liquid remains in the tank.



**Toolboxes:** Two sizes available:  
1230 (L) x 370 (W) x 370 (D)  
760 (L) x 320 (W) x 250 (D)



**Mud Flaps:** 6mm heavy duty rubber mud flaps



**Rear Linkages:** Linkages can be added to your tanker to allow slurry injector units to be fitted at a later stage.



Pumps

Type	Code	Description	Suitable for
PTO	MEC900MLF	Standard PTO driven vacuum pump	Traditional spreading, trailing shoe
	MEC110MLF		
	MEC135MLF		
GARDA	GARDA9000	Combination vacuum pump/centrifugal pump, with change over	Traditional spreading, rain gun, trailing shoe, umbilical systems, jetting, blaster bar for road cleaning
	GARDA11000		
	GARDA13500		
HYDRAULIC	MEC900HLF-S	Standard hydraulically driven vacuum pump	Traditional spreading, trailing shoe
	MEC110HLF-S		
	MEC135HLF-S		
BAUER	SX1000	Centrifugal Pump	Rain gun, trailing shoe, umbilical systems
ELBA	ELBA 6500TR	Centrifugal Pump	Rain gun, trailing shoe, umbilical systems
DODA	DODA A27CWBG	Centrifugal Pump	Rain gun, trailing shoe, umbilical systems

Principle

The vacuum system creates an atmospheric pressure difference in order to fill or empty the tanker. By creating a vacuum (depression) in the tank, slurry can be sucked. When spreading, the principle is reverse: the tank is pressurized by the pump, which allows it to expel the slurry.

What pump capacity to choose from

An appropriate capacity is used to create the vacuum before starting to fill the tank or to pressurize it during the spreading phase. The pump then “merely” has to keep this vacuum or pressure.

Choosing too large a pump means wasting tractor power, with a risk of unnecessary wear and tear. The effective vacuum rate is always the same, whatever the chosen type of pump may be.

Once the capacity of the pump is selected, it is possible to choose given type of greasing and cooling system.

Vanes

Most pump systems supplied on MAJOR tankers have vanes. The air flow is directed by a deflecting valve in order to spread or suck slurry. All normal vacuum pumps create the same “vacuum”; only the air flow capacity of the pump matters. The range of vacuum pumps with vanes supplied by MAJOR are 9000,11000 and 13,500 l/min.



PTO Pump



Garda Pump



Hydraulic Pump



Bauer



Elba Pump



Doda Pump (with arm for umbilical systems)





# Trailing Shoe

Retro-Fit Farmer Specification Slurry Application Unit

The MAJOR farmer specification Trailing Shoe sits close to the rear of the tanker for better weight distribution and is designed to fit any size tanker. This unit is easily mounted onto the back door without welding or fabricating, and can be used with the existing splashplate in place.

Slurry enters the Vogelsang ExaCut Macerator through the 4" bauer coupling and is distributed through the 40mm outlets. The macerator is fitted with an integrated foreign body separator to prevent debris from blocking the outlets. It also contains self sharpening and self adjusting blades meaning reduced maintenance times. A large capacity stone trap is located under the macerator which collects debris. It can be cleaned out easily, without the use of tools.

The high tensile springs use the high carbon steel coulter to split the grass – allowing the slurry to run on the ground. The spring steel bars on the frame allow the outlets to follow the ground contours.

### Features

- ✓ Fully galvanised body
- ✓ Vogelsang ExaCut macerator distributes slurry precisely and constantly
- ✓ Can be used with the existing splashplate in place
- ✓ Simple height adjustment allows the unit to be set according to tanker height making it adaptable to any tanker make or model.
- ✓ Full lighting board is fitted as standard

	MJ81-750
Working Width	7.5m (24' 7")
Transport Width	2.4m (8')
Wing pivot	100°
Height	2.9m (9' 6")
No. of outlets	30
Weight	690KG *including back door
Macerator	Vogelsang ExaCut 30/40
Spools required	3
Back door size	30"
Rear fill	Yes
Note	Can be self retro fitted



# Trailing Shoe

Contractor Specification Slurry Application Unit

The MAJOR MJTS6430 Slurry Applicator covers an area of 6.4m with 30 outlets. Slurry enters the Vogelsang macerator through the 4" bauer coupling and is distributed through the 40mm outlets. A large capacity sump is located under the macerator which collects debris. It can be cleaned out easily, without the use of tools.

The 40mm distribution pipes are finished off with couplings to allow simple maintenance of the rubber nozzles. The high tensile springs use the high carbon steel coulter to split the grass allowing the slurry to run on the ground. Pneumatic wheels are fitted as standard letting the frame follow the ground contours.

The ExaCut Macerator is fitted with an integrated foreign body separator to prevent debris from blocking the outlets. It also contains self sharpening and self adjusting blades meaning reduced maintenance times.



	MJTS6430
Working Width	6.4m (20' 11")
Transport Width	2.7m (8' 4")
No. of Outlets	24
Outlet Width	40mm
Hydraulic Requirement	50 - 70 litre/min @ 230 bar max

### Features

- ✓ Fully galvanised body
- ✓ Mechanical suspension
- ✓ Integrated spreader unit
- ✓ Automatic mechanical shut-off
- ✓ Vogelsang ExaCut macerator
- ✓ Full road lighting kit.





# Dribble Bar

Retro-Fit Universal Tanker Mounted Dribble Bar

The MAJOR Dribble Bar slurry applicator is designed to apply slurry to the soil surface as accurately as possible, while minimising grass contamination and ammonia emissions. This unit has 30 outlets spaced 260mm apart for even and precise distribution of liquid material in long and short grass.

A high-strength steel is used in the manufacture of the MAJOR Dribble Bar and is hot dipped galvanised to increase durability and lifespan.

## Features

- ✓ Easily mounted onto the back door without welding or fabricating for simple retro-fitting
- ✓ Vogelsang ExaCut macerator distributes slurry precisely and consistently
- ✓ Can be used with the existing splashplate in place
- ✓ Simple height adjustment allows the unit to be set according to tanker height making it adaptable to any tanker make or model.
- ✓ Full lighting board is fitted as standard
- ✓ Double self-aligning pivot hinge with easy access grease point on each wing



	MJ91-750
Working Width	7.5m (24' 7")
Transport Width	2.2m (7' 2")
Wing pivot	100°
Height	2.8m (9' 2")
No. of outlets	30
Weight	450KG *including back door
Macerator	Vogelsang ExaCut 30/40
Spools required	2 double acting hydraulic spools
Back door size	20" + 30"
Rear fill	Yes
Note	Can be self retro fitted



# Disc Injector

Slurry Application Unit

The MAJOR 5.2m Disc Injector is a combined soil fertilising and furrowing machine with a working depth from 20mm (3/4") to 60mm (2 1/2"). A powerful Vogelsang macerator delivers slurry evenly through 40mm pipes. The slurry is inserted into slits created by the spring steel self sharpening cutting discs. The unit folds hydraulically giving a 2.4m transport width.

The MAJOR Disc Injector operates best in grass/stubble of a height between 60-100mm (2 1/4 - 4"). When working, the spring loaded discs create slits of 20-60mm deep which are completely filled with slurry.

The slurry is only visible as narrow strips between the grass. The distance between the slits is 200mm (8").



	MJDI-5200
Working Width	5.2m (16' 5")
Transport Width	2.4m (8')
No. of Outlets	26
Working Depth	20-60mm
Weight	1380kg
Spread Capacity	10 - 30 m3 / ha

## Features

- ✓ 300mm self sharpening solid cutting discs spaced at 200mm (8") intervals
- ✓ Automatic mechanical shoe shut off to prevent spillage
- ✓ Mechanical suspension on individual discs Individual disc steerage
- ✓ Depth regulated by hydraulic linkage. (Hydraulic requirement: 50 - 70 litre/min @ 230 bar max)